



DURABASE® Fiberglass Shower Floors – Square and Rectangular



Homeowners and builders have made DURABASE® the leading brand of fiberglass shower floors because of great design features and unmatched quality. Pair DURABASE® Shower Floors with Mustee's DURAWALL® wall systems, tile or other wall treatment to create a beautiful shower space.

Features

- Sturdy, one-piece molded fiberglass
- Integrally molded drain with seal and removable strainer, except Model 3060 R/L
- Slip-resistant Starburst® floor design
- Connection to 2" Sch. 40 ABS, PVC or Iron DWV pipe
- Engineered to fit Mustee wall systems and tile
- Mold & mildew resistant – easy to clean



Optional Drain for 3060R & 3060L

Part No.	Description
60.300A	Drain Kit—White, Fits 3060L & 3060R
60.300ABN	Drain Kit—Bone, Fits 3060L & 3060R
42.317A	Drain—PVC with seal for 2" iron, PVC or ABS pipe

Optional Drain Seals (See reverse side)

Code Accepted

DURABASE® and SHOWERTUB™ Shower floors meet or exceed performance requirements.

- International Association of Plumbing and Mechanical Officials (IAPMO®) Listed
- American National Standards Institute (ANSI) – Specification Z 124-2011
- Warnock Hersey® (Canada) Listed – CSA test standards Shower Floor
- American Society of Testing and Materials (ASTM) – D 635 E-84 and E-162
- CAN/ULC S102-07 Burn & Smoke Test




Specifications

Square – Single Threshold


Nom. Size	Model	Color	A	B	C	D
32" x 32"	3232M	White, Bone	32"	32"	16"	16"
34" x 34"	3434M	White	34"	34"	17"	17"
36" x 36"	3636M	White, Bone, Biscuit	36"	36"	18"	18"
42" x 42"	4242M	White, Bone	42"	42"	21"	21"

Rectangular – Single Threshold

Nom. Size	Model	Color	A	B	C	D
30" x 60"	3060L*	White	60"	30"	15"	30"
30" x 60"	3060R*	White	60"	30"	15"	30"
32" x 48"	3248M	White, Bone, Biscuit	48"	32"	16"	24"
32" x 54"	3254M	White	54"	32"	16"	27"
32" x 60"	3260M	White	60"	32"	16"	30"
34" x 42"	3442M	White, Bone, Biscuit	42"	34"	17"	21"
34" x 48"	3448M	White, Bone, Biscuit	48"	34"	17"	24"
34" x 54"	3454M	White, Bone	54"	34"	17"	27"
34" x 60"	3460M	White, Bone, Biscuit	60"	34"	17"	30"
36" x 48"	3648M‡	White	48"	36"	18"	24"
36" x 60"	3660M‡	White	60"	36"	18"	30"
42" x 36"	4236M+	White	36"	42"	21"	18"

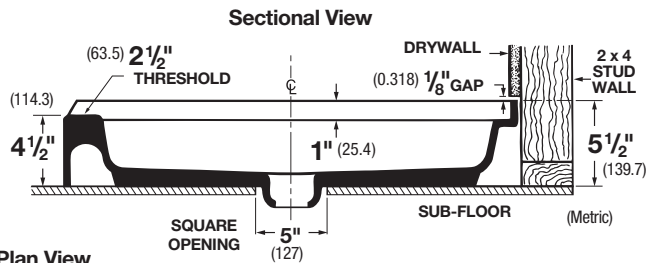

Plan View



*3060L & 3060R require a drain.

+Threshold is on the 36" side.

‡Available Fall 2014.

Color suffix: M for White, BN for Bone and BT for Biscuit (e.g. 3248BT).

General: Furnish and install as shown on plans, DURABASE® Shower Floor model _____, as manufactured by E.L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design that does not interfere with the flow of water. Size _____" x _____. Shoulder will be no less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4 1/2" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Specification Z 124-2011. Color _____ (White, Bone, Biscuit).



DURABASE® Fiberglass Shower Floors – Neo-Angle and Corner




Mustee's DURABASE® Neo-Angle or Corner shower floors transform your bathroom into a dramatic, luxury shower space.

DURABASE® shower floors can be used with several Mustee DURAWALL® shower wall systems, tile or other wall treatment to create a beautiful shower.

Features

- Sturdy, one-piece molded fiberglass
- Integrally molded drain with seal and removable strainer
- Slip-resistant Starburst® floor design
- Connection to 2" Sch. 40 ABS, PVC or Iron DWV pipe
- Engineered to fit Mustee wall systems and tile
- Mold & mildew resistant – easy to clean

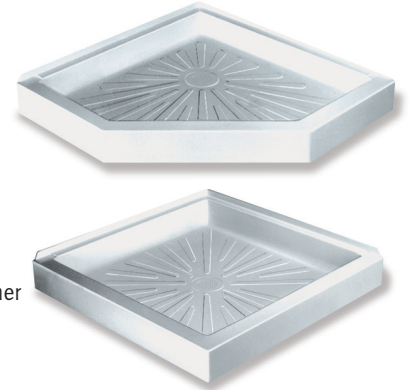

Code Accepted

DURABASE® Shower Floors meet or exceed performance requirements:

- International Association of Plumbing and Mechanical Officials (IAPMO®) Listed
- American National Standards Institute (ANSI) – Specification Z 124-2011
- Warnock Hersey® (Canada) Listed – CSA test standards Shower Floor
- American Society of Testing and Materials (ASTM) – D 635 E-84 and E-162
- CAN/ULC S102-07 Burn & Smoke Test



Specifications

Optional Drain Seals – (Ordered Separately)

Part No.	Description
32.404	Drain Seal for 2" copper pipe
32.405	Drain Seal for 1½" ABS/PVC pipe

NEO-ANGLE – Corner Threshold



Nom. Size	Model	Color	A	B	C	Center Lines*
36" x 36"	3636CM	White, Bone, Biscuit	36"	12"	18"	17½" x 24¾" x 17½"
38" x 38"	3838CM	White, Bone, Biscuit	38"	12"	20"	19½" x 24¾" x 19½"
42" x 42"	4242CM	White, Bone	42"	12"	24"	23½" x 24¾" x 23½"

Corner – Double Threshold

Nom. Size	Model	Color	A	B	C	Center Lines*
34" x 34"	3434DTM	White	34"	17"	-	-
36" x 36"	3636DTM	White	36"	18"	-	-

*Center line varies based upon thickness of side walls.

Color suffix: M for White, BN for Bone and BT for Biscuit (e.g. 3248BT).

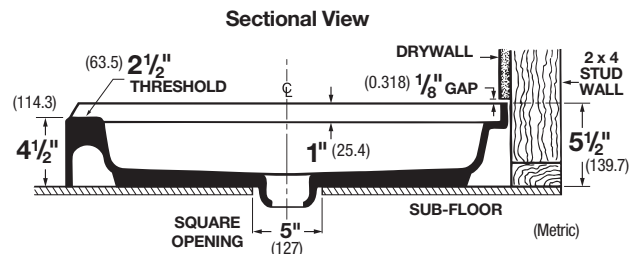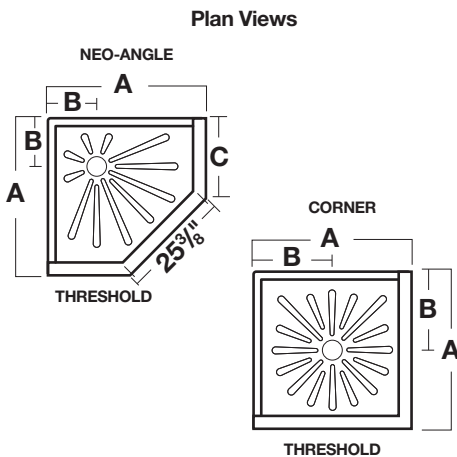

General: Furnish and install as shown on plans, DURABASE® Shower Floor model _____, as manufactured by E.L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design that does not interfere with the flow of water. Size _____ x _____. Shoulder will be no less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4½" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Specification Z 124.1.2. Color _____ (White, Bone, Biscuit).

