



Design features:

- Constructed using high grade, engineered aluminum
- Tempered safety clear glass
- Available in chrome or oil-rubbed bronze finishes
- Can be easily configured for left hand or right hand opening
- Integral pull handle with magnetic catch/seal
- Adjustable for out-of-plumb walls
- Easy to install and clean

Code Accepted


STYLEMATE® Enclosures meet or exceed performance requirements as listed:

- American National Standards Institute (ANSI) Specification Z 97.1



Specifications

Model	Finish	Glass	H	Opening	UPC	Fits DURABASE®
32.705	Chrome	Clear	65"	29-1/2" — 31-1/4"	6 71031 00462 8	3232M
32.706	Oil-Rubbed Bronze	Clear	65"	29-1/4" — 30-1/4"	6 71031 00463 5	3232M
36.403	Chrome	Clear	65"	33-1/2" — 35-1/4"	6 71031 00464 2	3636M
36.404	Oil-Rubbed Bronze	Clear	65"	33-3/4" — 35-3/4"	6 71031 00465 9	3636M

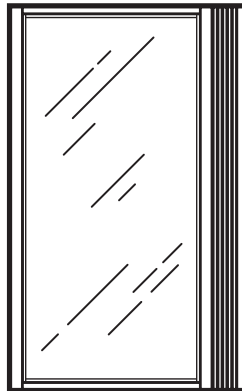

General: Furnish and install as shown on plans, a STYLEMATE® Pivot Door as manufactured by E.L. Mustee & Sons, Inc. Model _____ shall be a pivot-style door with a bright (Chrome, Oil-Rubbed Bronze) finish, aluminum frame and clear tempered safety glass panel. Continuous pull handle with magnetic seal. Out-of-plumb condition up to 1" can be adjusted at latch jamb. Can be installed for right or left opening. Shall meet ANSI Specifications Z97.1

