

## 63M Mop Service Basin – 24" x 24" x 10"







**The 63M is engineered and built to provide years of service.** A complete range of accessories are available to outfit your Model 63M Mop Basin.

### Features

- High impact resistant, one piece molded structural fiberglass.
- Generous 10" high side walls to contain splashes.
- Removable strainer.
- Integral molded-in-drain with seal for installing to 3" ABS, PVC (Sch. 80) or cast iron.
- Available drain seals for connecting 2" pipe or 3" no-hub soil pipe.
- Convenient anchor brackets for securing to wall.


### Code Accepted

- International Association of Plumbing and Mechanical Officials (IAPMO)® Listed 
- Warnock Hersey® (Canada) Listed—CSA Standards: Mop Basins – #B45.0 
- American National Standards Institute (ANSI) – Specification ANSI Z 124-2022 
- American Society of Testing and Materials (ASTM) – E-84 
- CAN/ULC S102-07 Burn and Smoke Test

### Specifications


**General:** Mop Service Basin Model 63M, as manufactured by E.L. Mustee & Sons, Inc. One-piece, molded fiberglass made with matched metal molds. Height shall be 10" with not less than 1" wide shoulder. Size 24" x 24". Drain shall be integrally molded with drain seal for installation of 3" ABS, PVC (Sch. #80) and iron pipe. Removable stainless steel strainer. Shall meet ANSI Specifications Z 124-2022. Color: White.


Model	Color	Length	Width
63M	White	24"	24"

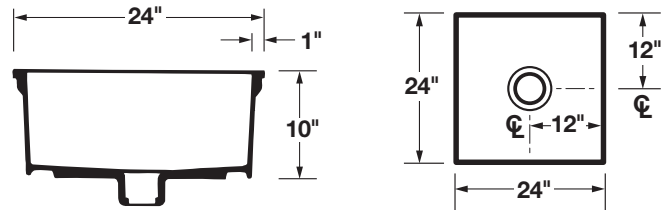

**Accessories** – for complete details and specifications visit [www.mustee.com](http://www.mustee.com)



- 1 63.600A SERVICE FAUCET** – Chrome plated brass service sink faucet, 1/2" pipe eccentric inlets on 8" centers. Vacuum breaker integral stops, chrome plated (H&C) handles, 3/4" hose end spout with pail hook, top reinforcing bar and mounting bracket. Shall meet ANSI Specifications A112.1.1, Section 2.9 and A112.18.1M, CSA Listed. 



- 2 65.700 HOSE and HOSE HOLDER** – Heavy-duty 5/8" diameter, reinforced 31" rubber hose with brass couplings on one end. Spring loaded, molded rubber hose holder mounts on stainless steel wall plate.



- 3 65.600 MOP HANGER** – Three spring-loaded rubber holders mounted to 3" x 22" stainless steel wall plate. Wall anchors and mounting screws included.



- 4 BUMPER GUARDS** – Protect rims, snap-on

#### High impact resistant vinyl

63.401 – 20 3/4" long white, fits Models 63M and 65M  
65.403 – 32 3/4" long white, fits Model 65M

#### Stainless steel

63.403 – 20 3/4" long, fits Models 63M and 65M  
65.404 – 32 3/4" long, fits Model 65M

- 5 DURAGUARD™ WALL GUARDS** – Protect wall surfaces, 12" height, 20 gauge, #304 stainless steel.

67.2424 – two panels and bracket for 24" x 24" corner  
67.2436 – two panels and bracket for 24" x 36" corner

- 6 OPTIONAL SEALS** – Order separately.

65.308 – for 2" PVC, ABS and iron  
65.309 – for 3" PVC, ABS and iron, included with mop basin  
65.311 – for 3" soil pipe (no hub)

## 65M Mop Service Basin – 24" x 36" x 10"







**The 65M is engineered and built to provide years of service.** A complete range of accessories are available to outfit your Model 65M Mop Basin.

### Features

- High impact resistant, one piece molded structural fiberglass.
- Elevated, self-draining shelf and removable strainer.
- Generous 10" high side walls to contain splashes.
- Integral molded-in-drain with seal for installing to 3" ABS, PVC (Sch. 80) or cast iron.
- Available drain seals for connecting 2" pipe or 3" no-hub soil pipe.
- Convenient anchor brackets for securing to wall.


### Code Accepted

- International Association of Plumbing and Mechanical Officials (IAPMO)<sup>®</sup> Listed 
- Warnock Hersey<sup>®</sup> (Canada) Listed—CSA Standards: Mop Basins – #B45.0 
- American National Standards Institute (ANSI) – Specification ANSI Z 124-2022 
- American Society of Testing and Materials (ASTM) – E-84 
- CAN/ULC S102-07 Burn and Smoke Test

### Specifications


**General:** Mop Service Basin Model 65M, as manufactured by E.L. Mustee & Sons, Inc. One-piece, molded fiberglass made with matched metal molds. Height shall be 10" with not less than 1" wide shoulder. Size 24" x 36" with integrally molded, self-draining shelf and drain with seal for installation of 3" ABS, PVC (Sch. #80) and iron pipe. Removable stainless steel strainer. Shall meet ANSI Specifications Z 124-2022. Color: White.


Model	Color	Length	Width
65M	White	24"	36"

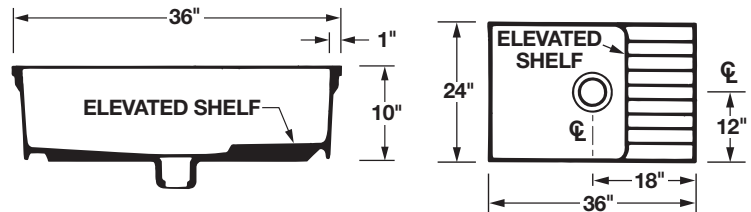

**Accessories** – for complete details and specifications visit [www.mustee.com](http://www.mustee.com)



- 1 63.600A SERVICE FAUCET** – Chrome plated brass service sink faucet, 1/2" pipe eccentric inlets on 8" centers. Vacuum breaker integral stops, chrome plated (H&C) handles, 3/4" hose end spout with pail hook, top reinforcing bar and mounting bracket. Shall meet ANSI Specifications A112.1.1, Section 2.9 and A112.18.1M, CSA Listed. 



- 2 65.700 HOSE and HOSE HOLDER** – Heavy-duty 5/8" diameter, reinforced 31" rubber hose with brass couplings on one end. Spring loaded, molded rubber hose holder mounts on stainless steel wall plate.



- 3 65.600 MOP HANGER** – Three spring-loaded rubber holders mounted to 3" x 22" stainless steel wall plate. Wall anchors and mounting screws included.



- 4 BUMPER GUARDS** – Protect rims, snap-on

#### High impact resistant vinyl

63.401 – 20 3/4" long white, fits Models 63M and 65M  
65.403 – 32 3/4" long white, fits Model 65M

#### Stainless steel

63.403 – 20 3/4" long, fits Models 63M and 65M  
65.404 – 32 3/4" long, fits Model 65M

- 5 DURAGUARD<sup>™</sup> WALL GUARDS** – Protect wall surfaces, 12" height, 20 gauge, #304 stainless steel.

67.2424 – two panels and bracket for 24" x 24" corner  
67.2436 – two panels and bracket for 24" x 36" corner

- 6 OPTIONAL SEALS** – Order separately.

65.308 – for 2" PVC, ABS and iron  
65.309 – for 3" PVC, ABS and iron, included with mop basin  
65.311 – for 3" soil pipe (no hub)