

Square Shower Ensembles 32" x 32"

DURAWALL® (Walls), DURABASE® (Floors) & STYLEMATE® (Pivot-Doors)



Mustee's 32" square shower ensemble is a combination of a DURABASE® shower floor, DURAWALL® shower walls and a STYLEMATE® pivot door. The shower ensemble is perfect for anyone looking to create a dramatic, shower space.

Features

- High quality, molded-fiberglass construction.
- DURAWALL® panels feature a sturdy, watertight tongue-and-groove and a large, molded-in shelf.
- Mounts direct-to-stud with mounting flanges.
- STYLEMATE® Pivot Door with tempered safety glass.
- DURABASE® fiberglass shower floors are strong, and feature a slip-resistant Starburst® floor design.
- All surfaces are mold/mildew resistant, easy to clean, with a deep-gloss finish.

Code Accepted

Meet or exceed performance requirements:

- American Society of Testing & Materials (ASTM) E-84 
- American National Standards Institute (ANSI) Specification Z 124-2022 and Z 97.1 
- IAPMO® as indicated 
- Warnock Hersey® as indicated 

Specifications

General: As manufactured by E.L. Mustee & Sons, Inc.

DURAWALL® Shower Wall	Model	Color	UPC
	732SWHT	White	


Model 732SWHT wall shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds with uniform thickness of 125 mils and mount direct-to-studwalls. Includes center panel and two side panels with molded-in shelf. Panels use a tongue-and-groove connection. Shall meet ANSI Specification Z 124-2022 Color: White.

DURABASE® Shower Floor	Model	Color	UPC	WH
	3232M	White	6 71031 00078 1	

Model 3232M floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design. Size 32" x 32". No less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4 1/2" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Specification Z 124-2022. Color: White.

STYLEMATE® Pivot-Door	Model	Color/Glass
	32.705	Silver/Clear
	32.706	Black Bronze/Clear

Model _____ fits 29" to 31" opening. Shall be a Pivot Door with a _____ (silver, black bronze) finish aluminum frame and clear tempered safety glass panel. Integral-pull handle with magnetic seal. Out-of-plumb conditions up to 1" can be adjusted at latch jamb. Can be installed for right or left opening. Shall meet ANSI Specification Z 97.1.

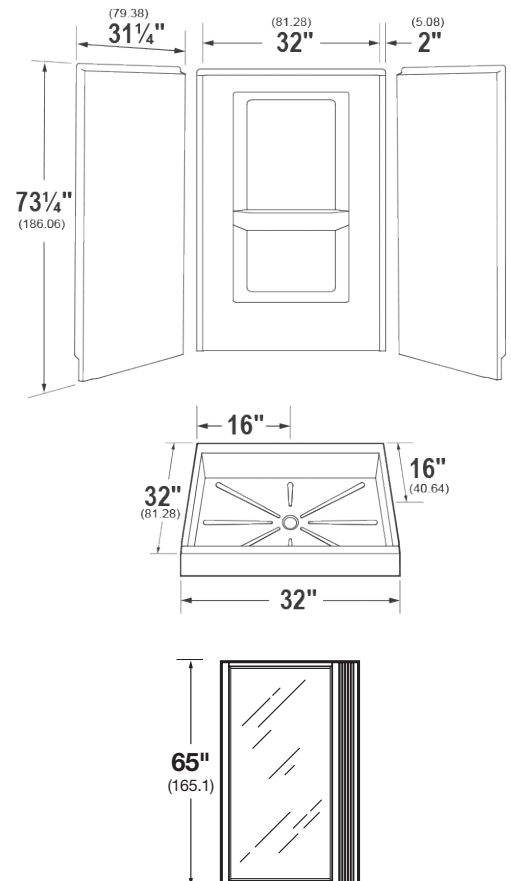

Square Shower Ensembles 36" x 36"

DURAWALL® (Walls), DURABASE® (Floors) & STYLEMATE® (Pivot-Doors)



Mustee's 36" square shower ensemble is a combination of a DURABASE® shower floor, DURAWALL® shower walls and a STYLEMATE® pivot door. The shower ensemble is perfect for anyone looking to create a dramatic, shower space.

Features

- High quality, molded-fiberglass construction.
- DURAWALL® panels feature a sturdy, watertight tongue-and-groove and a large, molded-in shelf.
- Mounts direct-to-stud with mounting flanges.
- STYLEMATE® Pivot Door with tempered safety glass.
- DURABASE® fiberglass shower floors are strong, and feature a slip-resistant Starburst® floor design.
- All surfaces are mold/mildew resistant, easy to clean, with a deep-gloss finish.

Code Accepted

Meet or exceed performance requirements:

- American Society of Testing & Materials (ASTM) E-84 
- American National Standards Institute (ANSI) Specification Z 124-2022 and Z 97.1 
- IAPMO® as indicated 
- Warnock Hersey® as indicated 

Specifications

General: As manufactured by E.L. Mustee & Sons, Inc.

DURAWALL® Shower Wall	Model	Color	UPC
	736SWHT	White	

Model 736SWHT wall shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds with uniform thickness of 125 mils and mount direct-to-studwalls. Includes center panel and two side panels with molded-in shelf. Panels use a tongue-and-groove connection. Shall meet ANSI Specification Z 124-2022 Color: White.

DURABASE® Shower Floor	Model	Color	UPC	WH
	3636M	White	6 71031 00148 1	

Model 3636M floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design. Size 36" x 36". No less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4½" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Specification Z 124-2022. Color: White.

STYLEMATE® Pivot-Door	Model	Color/Glass
	36.403	Silver/Clear
	36.404	Black Bronze/Clear

Model _____ fits 34" to 35" opening. Shall be a Pivot Door with a _____ (silver, black bronze) finish aluminum frame and clear tempered safety glass panel. Integral-pull handle with magnetic seal. Out-of-plumb conditions up to 1" can be adjusted at latch jamb. Can be installed for right or left opening. Shall meet ANSI Specification Z 97.1.

