



Design features:

- Precision molded using Mustee's premium VARISTONE® fiberglass
- Fits standard 30" x 60" alcove
- Apron supported by twin molded fiberglass brackets for extra stability
- A network of bottom and side structural support
- One-piece molded, with matched metal molds for high strength and integral rigidity
- 40° lumbar slope for relaxed reclining while soaking
- 8-1/2" x 14-1/4" drain offset
- Easy to clean, colorfast white semi-gloss finish

Code Accepted

TOPAZ™ Fiberglass Bathtubs meet or exceed performance requirements as listed:


- International Association of Plumbing and Mechanical Officials (IAPMO)® Listed
- American National Standards Institute (ANSI) - Specification ANSI Z 124-2017
- ADA



Specifications

Model No.	Color	H x W x L	Drain Position	UPC
T6030L	White	16-1/2" x 30" x 60"	LH	6 71031 00411 6
T6030LBN	Bone	16-1/2" x 30" x 60"	LH	6 71031 00414 7
T6030LBT	Biscuit	16-1/2" x 30" x 60"	LH	6 71031 00432 1

Inside depth: 14-1/4"

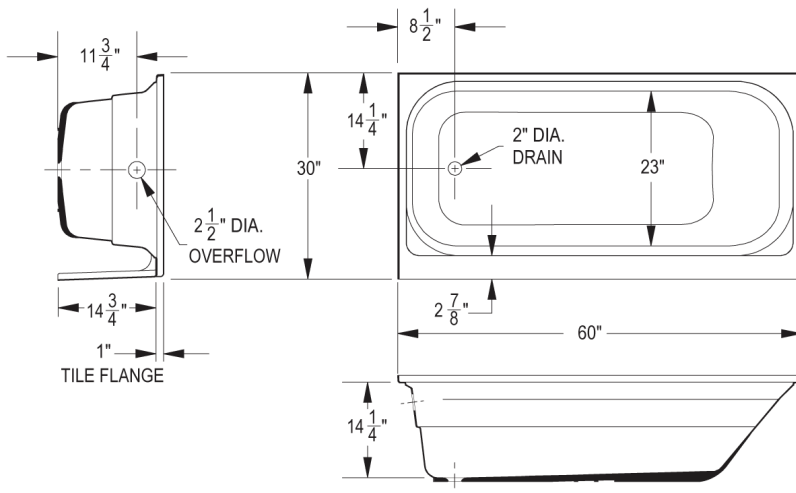

General: Furnish and install as shown on plans, TOPAZ® bathtub as manufactured by E.L. Mustee & Sons, Inc. Shall be a fiberglass 30" x 60": right hand or left hand Model _____. Construction shall be molded, reinforced fiberglass using matched metal molds under extreme heat and pressure. Shall meet ANSI Specification Z 124-2011. Color: _____ (White, Bone, Biscuit) Weight: 74 lbs. Install in compliance with local codes.

ADA compliant when installed to the specific requirements of these regulations.

